

Koyo



Cylindrical Roller Bearings European Production only



JTEKT

Koyo

TOYODA

Koyo Cylindrical Roller Bearings

"...Where accurate rotational control is required..."

Introduction

Koyo Cylindrical Roller bearings are the products of choice for applications requiring high radial load capacity. Thanks to the rollers and raceways being in constant linear contact. This type of bearing is equally suitable whenever a combination of heavy radial and impact loads are involved.

Our European manufactured Cylindrical Roller bearings range from 20mm – 65mm bore diameter. They have been successfully used in many applications such as planetary gears, transmissions, hydraulic pumps and many other types of industrial machinery.

In addition to the range of single row Cylindrical Roller bearings manufactured in our European operations, Koyo produces a full range of Cylindrical Roller bearings at our facilities in Japan, including single row, double row, four row and full complement variations, with bore sizes from 20mm – 2500mm+.

Machined with great accuracy, Koyo Cylindrical roller bearings guarantee optimal performance at high speeds.

Product line up

Single-row radial bearings (Metric series)

Koyo Cylindrical Roller bearings are designed with integral end flanges on the outer ring providing accurate guiding of the rolling elements. The inner rings are separable to allow for simplified mounting and removal when required. The line contact between the Cylindrical Rollers and raceways has been modified, to reduce edge stressing and the bearings are manufactured to reference standard DN5412.

Upon request, all NU design bearings can be provided without inner rings. This product variant is recognised by the letter 'R' in the prefix.

* Note:


- ✓ E-design bearing, molded window type cage of engineered polymer can be recognized by the letters "E.TVP" mentioned in the suffix.
- ✓ Machined brass caged can be recognized by the letter "M" in the suffix

Types | NU | NJ | NUP | RNU

The different types of Cylindrical Roller bearings can be recognized by the arrangement of their end ribs.


Koyo Cylindrical Roller bearings are available in the following types:

NU

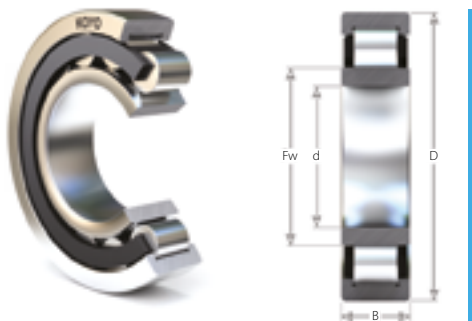

Bearings of NU design have two integral flanges on the outer ring. Their cylindrical inner ring makes these types of products well suited for use as floating bearings. NU design bearings are fully separable, which simplifies their mounting and removal.


NUP

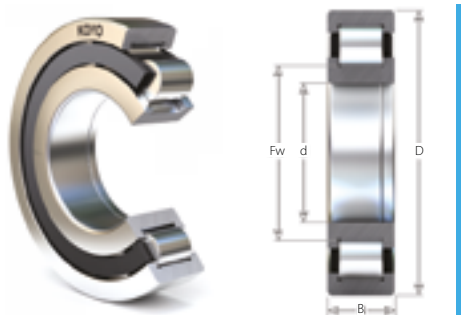

Cylindrical bearing type NUP has a double ribbed outer ring and a single-ribbed inner ring with an abutting loose rib, which allows the bearing to provide axial location and to carry light thrust loads in both directions.




NJ



Cylindrical roller radial bearings of NJ design have two integral flanges on the outer ring and one integral flange on the inner ring. This type is particularly suitable in case of axial loading in one direction.

RNU



Cylindrical Roller bearings of RNU style are supplied without the inner ring, so that the rolling elements are run directly onto an appropriately hardened and ground shaft. For the majority of general applications this requires the shaft to be machined to g6 and the housing bore to K6 tolerance.

Cage

Cylindrical Roller bearings series starting with 2..E, 22..E, 3..E and 23..E are equipped with cages made from glass fiber reinforced polyamide. These cage constructions allow maximum load carrying capability and can be used in operating temperatures up to 120° Celsius over extended periods. For this kind of cage we use the suffix TVP. Other polymer cages which can perform in much higher temperatures are also available on request. For more information, please contact your nearest Koyo Engineer.

In very rare cases a non-compatibility with the cage material can occur when lubricating with oil. Please contact your nearest Koyo engineer when this happens.

Machined Brass cages can be offered when a bearing has to operate in extreme environments. These cages are designated by the suffix "M"

Dimension accuracy, tolerance and bearing clearance


Metric series Cylindrical Roller radial bearings are available in various tolerance classes and clearance groups. Single row cylindrical roller bearings are made to normal clearance group C0. Upon request Koyo can equally provide Cylindrical Roller bearings with radial clearance C2, C3 and C4.

Koyo®







Product table



NU



NUP



NJ



S1 = axial displacement

RNU

Boundary dimensions										Bearing No.	C3 radial Clearance	Brass Cage	Basic load ratings (kN)		Limiting speeds (min ⁻¹)		Mass
d	D	B	F _w	E _w	r min.	r ₁ min.	H ≈	J ≈	S1				Cr	C0r	Grease lub.	Oil lub.	(kg)
15	35	11	19.3	30.3	0.6	0.3	27.8	21.8		NJ202E.TVP	✓	✓	17.4	11.6	16000	25000	0.047
	35	11	19.3	30.3	0.6	0.3	27.8		1	NU202E.TVP	✓	✓	17.4	11.6	16000	25000	0.047
17	40	12	22.1	35.1	0.6	0.3	32.0	24.7		NJ203E.TVP	✓		23.7	16.0	14000	22000	0.068
	40	12	22.1	35.1	0.6	0.3	32.0		1.2	NU203E.TVP	✓		23.7	16.0	14000	22000	0.068
	40	12	22.1	35.1	0.6	0.3	32.0	24.7		NUP203E.TVP	✓		23.7	16.0	14000	22000	0.068
	40	16	22.1	35.1	0.6	0.3	32.0	24.7		NJ2203E.TVP	✓		31.7	23.3	14000	22000	0.091
	40	16	22.1	35.1	0.6	0.3	32.0		1	NU2203E.TVP	✓		31.7	23.3	14000	22000	0.091
	40	16	22.1	35.1	0.6	0.3	32.0	24.7		NUP2203E.TVP	✓		31.7	23.3	14000	22000	0.091
	47	14	24.2	40.2	1.1	0.6	36.8	27.6		NJ303E.TVP	✓		33.5	22.8	13000	21000	0.121
	47	14	24.2	40.2	1.1	0.6	36.8		1.2	NU303E.TVP	✓		33.5	22.8	13000	21000	0.121
	47	14	24.2	40.2	1.1	0.6	36.8	27.6		NUP303E.TVP	✓		33.5	22.8	13000	21000	0.121
20	47	14	26.5	41.5	1.0	0.6	38.4	29.9		NJ204E.TVP	✓	✓	36.3	26.5	12000	18000	0.133
	47	14	26.5	41.5	1.0	0.6	38.4		1	NU204E.TVP	✓	✓	36.3	26.5	12000	18000	0.133
	47	14	26.5	41.5	1.0	0.6	38.4	29.9		NUP204E.TVP	✓	✓	36.3	26.5	12000	18000	0.133
	47	18	26.5	41.5	1.0	0.6	38.4	29.9		NJ2204E.TVP	✓		42.7	32.7	12000	18000	0.142
	47	18	26.5	41.5	1.0	0.6	38.4		1.8	NU2204E.TVP	✓		42.7	32.7	12000	18000	0.142
	47	18	26.5	41.5	1.0	0.6	38.4	29.9		NUP2204E.TVP	✓		42.7	32.7	12000	18000	0.142
	52	15	27.5	45.5	1.1	0.6	41.8	31.4		NJ304E.TVP	✓		40.8	28.0	12000	18000	0.152
	52	15	27.5	45.5	1.1	0.6	41.8		1.1	NU304E.TVP	✓		40.8	28.0	12000	18000	0.152
	52	15	27.5	45.5	1.1	0.6	41.8	31.4		NUP304E.TVP	✓		40.8	28.0	12000	18000	0.152
	52	21	27.5	45.5	1.1	0.6	41.8	31.4		NJ2304E.TVP	✓		53.7	40.0	12000	18000	0.207
	52	21	27.5	45.5	1.1	0.6	41.8		2	NU2304E.TVP	✓		53.7	40.0	12000	18000	0.207
	52	21	27.5	45.5	1.1	0.6	41.8	31.4		NUP2304E.TVP	✓		53.7	40.0	12000	18000	0.207
	25	47	12	30.5	41.5	0.6	0.3	38.9		2.4	NU1005M	✓	✓	18.4	13.6	9800	15000
52		15	30.5	41.5	0.6	0.3	38.9	34.9		NJ205E.TVP	✓	✓	38.8	29.8	9800	15000	0.140
52		15	30.5	41.5	0.6	0.3	38.9		1.3	NU205E.TVP	✓	✓	38.8	29.8	9800	15000	0.140
52		15	30.5	41.5	0.6	0.3	38.9	34.9		NUP205E.TVP	✓	✓	38.8	29.8	9800	15000	0.140
52		18	30.5	41.5	0.6	0.3	38.9	34.9		NJ2205E.TVP	✓		45.6	36.7	9800	15000	0.160
52		18	30.5	41.5	0.6	0.3	38.9		1.7	NU2205E.TVP	✓		45.6	36.7	9800	15000	0.160
52		18	30.5	41.5	0.6	0.3	38.9	34.9		NUP2205E.TVP	✓		45.6	36.7	9800	15000	0.160
62		17	34.0	54.0	1.1	1.1	50.1	38.3		NJ305E.TVP	✓	✓	53.6	38.9	9400	14000	0.243
62		17	34.0	54.0	1.1	1.1	50.1		1.5	NU305E.TVP	✓	✓	53.6	38.9	9400	14000	0.243
62		17	34.0	54.0	1.1	1.1	50.1	38.3		NUP305E.TVP	✓	✓	53.6	38.9	9400	14000	0.243
62		24	34.0	54.0	1.1	1.1	50.1	38.3		NJ2305E.TVP	✓		72.7	57.6	9400	14000	0.348
62		24	34.0	54.0	1.1	1.1	50.1		1.9	NU2305E.TVP	✓		72.7	57.6	9400	14000	0.348
62		24	34.0	54.0	1.1	1.1	50.1	38.3		NUP2305E.TVP	✓		72.7	57.6	9400	14000	0.348
30	55	13	36.5	48.5	1.0	0.6	45.7		2.4	NU1006M	✓	✓	27.6	22.9	8100	13000	0.134
	62	16	37.5	55.5	1.0	0.6	52.0	41.4		NJ206E.TVP	✓		50.6	39.0	8300	13000	0.206
	62	16	37.5	55.5	1.0	0.6	52.0		1.4	NU206E.TVP	✓		50.6	39.0	8300	13000	0.206
	62	16	37.5	55.5	1.0	0.6	52.0	41.4		NUP206E.TVP	✓		50.6	39.0	8300	13000	0.206
	62	20	37.5	55.5	1.0	0.6	52.0	41.4		NJ2206E.TVP	✓		62.7	51.5	8300	13000	0.255
	62	20	37.5	55.5	1.0	0.6	52.0		1.6	NU2206E.TVP	✓		62.7	51.5	8300	13000	0.255
	62	20	37.5	55.5	1.0	0.6	52.0	41.4		NUP2206E.TVP	✓		62.7	51.5	8300	13000	0.255
	72	19	40.5	62.5	1.1	1.1	58.3	45.1		NJ306E.TVP	✓		68.3	52.1	7800	12000	0.370
	72	19	40.5	62.5	1.1	1.1	58.3		1.9	NU306E.TVP	✓		68.3	52.1	7800	12000	0.370
	72	19	40.5	62.5	1.1	1.1	58.3	45.1		NUP306E.TVP	✓		68.3	52.1	7800	12000	0.370
	72	27	40.5	62.5	1.1	1.1	58.3	45.1		NJ2306E.TVP	✓		95.0	79.5	7800	12000	0.530
	72	27	40.5	62.5	1.1	1.1	58.3		2.5	NU2306E.TVP	✓		95.0	79.5	7800	12000	0.530
	72	27	40.5	62.5	1.1	1.1	58.3	45.1		NUP2306E.TVP	✓		95.0	79.5	7800	12000	0.530

Boundary dimensions													Basic load ratings (kN)		Limiting speeds (min ⁻¹)		Mass	
<i>d</i>	<i>D</i>	<i>B</i>	<i>F_w</i>	<i>E_w</i>	<i>r</i> min.	<i>r</i> ₁ min.	<i>H</i> =	<i>J</i> =	<i>S</i> 1	Bearing No.	C3 radial Clearance	Brass Cage	<i>C_r</i>	<i>C</i> _{0r}	Grease lub.	Oil lub.	(kg)	
35	62	14	42.0	55.0	1.0	0.6	51.9			NU1007M	✓	✓	33.3	28.7	7000	11000	0.186	
	72	17	44.0	64.0	1.1	0.6	60.1	48.0		NJ207E.TVP	✓	✓	64.8	52.2	7000	11000	0.303	
	72	17	44.0	64.0	1.1	0.6	60.1			NU207E.TVP	✓	✓	64.8	52.2	7000	11000	0.303	
	72	17	44.0	64.0	1.1	0.6	60.1	48.0		NUP207E.TVP	✓	✓	64.8	52.2	7000	11000	0.303	
	72	23	44.0	64.0	1.1	0.6	60.1	48.0		NJ2207E.TVP	✓		78.9	67.3	7000	11000	0.395	
	72	23	44.0	64.0	1.1	0.6	60.1			NU2207E.TVP	✓		78.9	67.3	7000	11000	0.395	
	72	23	44.0	64.0	1.1	0.6	60.1	48.0		NUP2207E.TVP	✓		78.9	67.3	7000	11000	0.395	
	80	21	46.2	70.2	1.5	1.1	65.7	51.2		NJ307E.TVP	✓		85.3	67.4	6800	10000	0.485	
	80	21	46.2	70.2	1.5	1.1	65.7			NU307E.TVP	✓		85.3	67.4	6800	10000	0.485	
	80	21	46.2	70.2	1.5	1.1	65.7	51.2		NUP307E.TVP	✓		85.3	67.4	6800	10000	0.485	
	80	31	46.2	70.2	1.5	1.1	65.7	51.2		NJ2307E.TVP	✓		118.0	103.0	6800	10000	0.720	
	80	31	46.2	70.2	1.5	1.1	65.7			NU2307E.TVP	✓		118.0	103.0	6800	10000	0.720	
80	31	46.2	70.2	1.5	1.1	65.7	51.2		NUP2307E.TVP	✓		118.0	103.0	6800	10000	0.720		
40	68	15	47.0	61.0	1.0	0.6	57.6			NU1008M	✓	✓	39.7	35.4	6200	9600	0.225	
	80	18	49.5	71.5	1.1	1.1	67.3	54.1		NJ208E.TVP	✓	✓	71.8	57.7	6200	9600	0.380	
	80	18	49.5	71.5	1.1	1.1	67.3			NU208E.TVP	✓	✓	71.8	57.7	6200	9600	0.380	
	80	18	49.5	71.5	1.1	1.1	67.3	54.1		NUP208E.TVP	✓	✓	71.8	57.7	6200	9600	0.380	
	80	23	49.5	71.5	1.1	1.1	67.3	54.1		NJ2208E.TVP	✓		92.4	79.8	6200	9600	0.490	
	80	23	49.5	71.5	1.1	1.1	67.3			NU2208E.TVP	✓		92.4	79.8	6200	9600	0.490	
	80	23	49.5	71.5	1.1	1.1	67.3	54.1		NUP2208E.TVP	✓		92.4	79.8	6200	9600	0.490	
	90	23	52.0	80.0	1.5	1.5	74.9	57.7		NJ308E.TVP	✓		105.0	82.7	6100	9300	0.660	
	90	23	52.0	80.0	1.5	1.5	74.9			NU308E.TVP	✓		105.0	82.7	6100	9300	0.660	
	90	23	52.0	80.0	1.5	1.5	74.9	57.7		NUP308E.TVP	✓		105.0	82.7	6100	9300	0.660	
	90	33	52.0	80.0	1.5	1.5	74.9	57.7		NJ2308E.TVP	✓		144.0	123.0	6100	9300	0.950	
	90	33	52.0	80.0	1.5	1.5	74.9			NU2308E.TVP	✓		144.0	123.0	6100	9300	0.950	
	90	33	52.0	80.0	1.5	1.5	74.9	57.7		NUP2308E.TVP	✓		144.0	123.0	6100	9300	0.950	
	45	75	16	52.5	67.5	1.0	0.6	63.9			NU1009M	✓	✓	46.8	43.1	5600	8600	0.287
85		19	54.5	76.5	1.1	1.1	72.4	59.1		NJ209E.TVP	✓		81.0	68.9	5600	8700	0.445	
85		19	54.5	76.5	1.1	1.1	72.4			NU209E.TVP	✓		81.0	68.9	5600	8700	0.445	
85		19	54.5	76.5	1.1	1.1	72.4	59.1		NUP209E.TVP	✓		81.0	68.9	5600	8700	0.445	
85		23	54.5	76.5	1.1	1.1	72.4	59.1		NJ2209E.TVP	✓		97.2	87.0	5600	8600	0.530	
85		23	54.5	76.5	1.1	1.1	72.4			NU2209E.TVP	✓		97.2	87.0	5600	8600	0.530	
85		23	54.5	76.5	1.1	1.1	72.4	59.1		NUP2209E.TVP	✓		97.2	87.0	5600	8600	0.530	
100		25	58.5	88.5	1.5	1.5	83.1	64.6		NJ309E.TVP	✓		127.0	104.0	5400	8200	0.895	
100		25	58.5	88.5	1.5	1.5	83.1			NU309E.TVP	✓		127.0	104.0	5400	8200	0.895	
100		25	58.5	88.5	1.5	1.5	83.1	64.6		NUP309E.TVP	✓		127.0	104.0	5400	8200	0.895	
100		36	58.5	88.5	1.5	1.5	83.1	64.6		NJ2309E.TVP	✓		176.0	158.0	5400	8200	1.290	
100		36	58.5	88.5	1.5	1.5	83.1			NU2309E.TVP	✓		176.0	158.0	5400	8200	1.290	
100		36	58.5	88.5	1.5	1.5	83.1	64.6		NUP2309E.TVP	✓		176.0	158.0	5400	8200	1.290	
50		80	16	57.5	72.5	1.0	0.6	68.9			NU1010M	✓	✓	41.3	37.3	5000	7900	0.315
	90	20	59.5	81.5	1.1	1.1	77.4	64.1		NJ210E.TVP	✓		84.8	74.5	5100	7800	0.049	
	90	20	59.5	81.5	1.1	1.1	77.4			NU210E.TVP	✓		84.8	74.5	5100	7800	0.049	
	90	20	59.5	81.5	1.1	1.1	77.4	64.1		NUP210E.TVP	✓		84.8	74.5	5100	7800	0.049	
	90	23	59.5	81.5	1.1	1.1	77.4	64.1		NJ2210E.TVP	✓		102.0	94.1	5100	7800	0.575	
	90	23	59.5	81.5	1.1	1.1	77.4			NU2210E.TVP	✓		102.0	94.1	5100	7800	0.575	
	90	23	59.5	81.5	1.1	1.1	77.4	64.1		NUP2210E.TVP	✓		102.0	94.1	5100	7800	0.575	
	110	27	65.0	97.0	2.0	2.0	91.4	71.4		NJ310E.TVP	✓		143.0	119.0	4800	7400	1.140	
	110	27	65.0	97.0	2.0	2.0	91.4			NU310E.TVP	✓		143.0	119.0	4800	7400	1.140	
	110	27	65.0	97.0	2.0	2.0	91.4	71.4		NUP310E.TVP	✓		143.0	119.0	4800	7400	1.140	
	110	40	65.0	97.0	2.0	2.0	91.4	71.4		NJ2310E.TVP	✓		143.0	119.0	4800	7400	1.740	
	110	40	65.0	97.0	2.0	2.0	91.4			NU2310E.TVP	✓		143.0	119.0	4800	7400	1.740	
110	40	65.0	97.0	2.0	2.0	91.4	71.4		NUP2310E.TVP	✓		143.0	119.0	4800	7400	1.740		
55	90	18	64.5	80.5	1.1	1.0	76.7			NU1011M	✓	✓	53.9	52.4	4500	6900	0.464	
	100	21	66.0	90.0	1.5	1.1	85.6	71.0		NJ211E.TVP	✓		110.0	102.0	4500	7000	0.665	
	100	21	66.0	90.0	1.5	1.1	85.6			NU211E.TVP	✓		110.0	102.0	4500	7000	0.665	
	100	21	66.0	90.0	1.5	1.1	85.6	71.0		NUP211E.TVP	✓		110.0	102.0	4500	7000	0.665	
	100	25	66.0	90.0	1.5	1.1	85.6	71.0		NJ2211E.TVP	✓		129.0	125.0	4500	7000	0.780	
	100	25	66.0	90.0	1.5	1.1	85.6			NU2211E.TVP	✓		129.0	125.0	4500	7000	0.780	
	100	25	66.0	90.0	1.5	1.1	85.6	71.0		NUP2211E.TVP	✓		129.0	125.0	4500	7000	0.780	
	120	29	70.5	106.5	2.0	2.0	100.3	77.7		NJ311E.TVP	✓		178.0	149.0	4400	6800	1.470	
	120	29	70.5	106.5	2.0	2.0	100.3			NU311E.TVP	✓		178.0	149.0	4400	6800	1.470	
	120	29	70.5	106.5	2.0	2.0	100.3	77.7		NUP311E.TVP	✓		178.0	149.0	4400	6800	1.470	
	60	110	22	72.0	100.0	1.5	1.5	95.1	77.7		NJ212E.TVP	✓		123.0	109.0	4200	6500	0.825
		110	22	72.0	100.0	1.5	1.5	95.1			NU212E.TVP	✓		123.0	109.0	4200	6500	0.825
110		22	72.0	100.0	1.5	1.5	95.1	77.7		NUP212E.TVP	✓		123.0	109.0	4200	6500	0.825	
110		28	72.0	100.0	1.5	1.5	95.1	77.7		NJ2212E.TVP	✓		165.0	158.0	4200	6500	1.080	
110		28	72.0	100.0	1.5	1.5	95.1			NU2212E.TVP	✓		165.0	158.0	4200	6500	1.080	
110		28	72.0	100.0	1.5	1.5	95.1	77.7		NUP2212E.TVP	✓		165.0	158.0	4200	6500	1.080	
65	120	31	78.5	108.5	1.5	1.5	103.2	84.6		NJ2213E.TVP	✓		192.0	188.0	3800	5900	1.420	
	120	31	78.5	108.5	1.5	1.5	103.2			NU2213E.TVP	✓		192.0	188.0	3800	5900	1.420	
	120	31	78.5	108.5	1.5	1.5	103.2	84.6		NUP2213E.TVP	✓		192.0	188.0	3800	5900	1.420	

JTEKT Europe Bearings BV
Markerkant 13-01
1314 AL ALMERE, The Netherlands
☎ +31 (0)36 538 3333
✉ info-eu@jtekt.com

Koyo Italia SRL
Territory: Italy
Via G. Stephenson 43a
20157 Milano, Italy
☎ +39 (0)22 951 0844
✉ koyo.italia@jtekt.com

Koyo Benelux Branch Office
Territory: Belgium, The Netherlands & Luxembourg
Energieweg 10a
2964 LE Groot-Ammers, The Netherlands
☎ +31 (0)18 460 6800
✉ info.Koyo-Benelux@jtekt.com

Koyo Kullager Scandinavia AB
Territory: Sweden, Norway & Finland
Kanalvägen 5a
19461 Upplands-Väsby, Sweden
☎ +46 (0)85 942 1210
✉ kks-info@jtekt.com

Koyo Deutschland GMBH
Territory: Germany, Austria, Switzerland, Denmark, Turkey, Poland, Russia,
Ukraine, Belarus, Bulgaria, Czech Republic, Hungary, Serbia & Montenegro,
Croatia, Slovakia, Slovenia, Bosnia & Herzegovina, Latvia and Macedonia
Bargkoppelweg 4
22145 Hamburg, Germany
☎ +49 (0)40 679 0900
✉ info@koyo.de

Koyo Romania Representative Office
Territory: Romania, Greece & Israel
Str. Dr. Lister 24, ap1
Sector 5, cod 050543 Bucurest, Romania
☎ +40 (0)21 410 4182
✉ carmen.berbecaru@jtekt.com (Romanian territory)
✉ mariabianca.predut@jtekt.com (Israeli & Greek territory)

Koyo France SA
Territory: France, Algeria, Morocco & Tunisia
1 rue François Jacob
92500 Rueil-Malmaison Cedex
☎ +33 (0)14 139 8000
✉ infokf@jtekt.com

Koyo UK LTD
Territory: United Kingdom & Ireland
Whitehall Avenue, Kingston, Milton Keynes
Buckinghamshire MK10 OAX, U.K.
☎ +44 (0)19 082 89300
✉ sales@koyo.co.uk

Koyo Iberica SL
Territory: Spain & Portugal
Centro de Negocios,
Calle La Mancha no.1 oficina 1.2
28823 Coslada (Madrid), Spain
☎ +34 (0)91 329 0818
✉ info-kib@jtekt.com

JTEKT Poland Branch Office
(Koyo Needle Roller Bearings Division)
3. Maja 14
41-200 Sosnowiec, Poland
☎ +48 (0)32 746 7777
✉ info-eu@jtekt.com

www.koyo.eu << visit us at